



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number:

0 525 652 A1

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 92112632.2

(51) Int. Cl.⁵: H04N 5/63, H04N 3/185

(22) Date of filing: 23.07.92

(30) Priority: 01.08.91 GB 9116616

(43) Date of publication of application:
03.02.93 Bulletin 93/05

(84) Designated Contracting States:
DE ES FR GB IT


(71) Applicant: THOMSON CONSUMER
ELECTRONICS S.A.
9, Place des Vosges, La Défense 5
F-92400 Courbevoie(FR)

(72) Inventor: Wu, Chun Hsing
Blk 170, Bishan St. 13, No.08-63
Singapore 2057(SG)

(74) Representative: Einsele, Robert, Dipl.-Ing.
Deutsche Thomson-Brandt GmbH Patent-
und Lizenzabteilung Göttinger Chaussee 76
W-3000 Hannover 91(DE)

(54) Switched mode power supply with startup precharge.

(57) A television receiver has a switched mode power supply for regulating an output voltage, including a power transformer (LP36) having a primary winding (W1) coupled to an unregulated voltage (VIN) via a power transistor. The power transistor is controlled by pulses (V_{con}) from the output of a controller (20). In order to sweep the base-emitter charge from the power transistor in order to end collector-emitter conduction, the base of the power transistor is coupled to the output of the pulse generating controller via a capacitor (CP24) in parallel with at least one diode (DP24, 26, 27). During a pulse from the controller, the capacitor is charged to a voltage equal to the forward biased drop across the diode(s). At the end of a pulse at the output of the controller, the voltage across the capacitor provides a negative voltage at the base of the transistor, thus sweeping out the base-emitter charge and sharply turning the transistor off. In order to assure this function of the capacitor even upon plug-in startup, the capacitor is precharged via a resistor (RP324) coupled between the output of the controller (pin 14) and the unregulated voltage input (VIN).

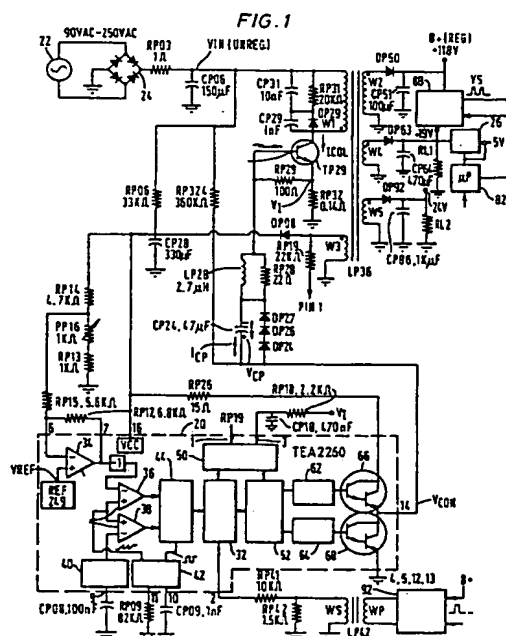

EP 0 525 652 A1

The invention relates to a television receiver with a switched mode power supply having a power transistor coupled to a controller via a pull down capacitor, and wherein the pull down capacitor is precharged for achieving stable operation promptly after plug-in startup.

A switched mode power supply transfers a variable amount of power from an unregulated DC supply voltage to load circuits coupled to secondary windings of a power transformer. In conjunction with a pulse width modulator, a power supply controller applies pulses to the primary winding of the transformer via a power transistor. By feeding back the voltage level at a given secondary winding and varying the pulse width to maintain the voltage at the secondary winding equal to a reference level, the power supply regulates the voltage in all of the secondary windings.

An example of a switched mode power supply controller is SGS-Thomson Microelectronics type TEA2260. The pulses applied to the primary winding of the power supply transformer by the TEA2260 controller are synchronized to the horizontal retrace pulses in an operational mode or run mode, and are internally generated by the controller in the standby mode, when retrace pulses are not produced. The current pulses in the power transformer are varied in pulse width for regulating the output voltage at the secondary windings, including the B+ scan supply voltage which is applied to the flyback transformer, but loaded only in the operational mode.

In the operational mode, the B+ voltage is fed back to the controller in the form of a pulse width modulated signal obtained from a pulse width modulator located on the secondary side of the power transformer, the feedback being sent to the controller located on the primary side via a signal transformer. The switched mode power supply remains active in both the run mode and the standby mode, providing power in the standby mode to those circuits which control switching between the run mode and the standby mode, such as the infrared receiver and the system microprocessor which monitors the infrared receiver. In the run mode the switched mode power supply not only powers the active switching circuits, but also powers the flyback transformer to drive the horizontal deflection circuit and the flyback-derived high voltage power supply. The B+ supply voltage for the flyback transformer is generated whenever pulses are output from the switched mode power supply controller, i.e., in both the run mode and the standby mode.

To enter the standby mode, the horizontal oscillator is disabled by a signal generated by the system microprocessor. When no horizontal signal is available, in the absence of horizontal scanning,

the TEA2260 controller free runs at a pulse frequency defined by the time constant of a capacitor and resistor coupled thereto, and regulates its output by feedback from a secondary winding of the power transformer which generates the VCC supply voltage to the TEA2260 controller, instead of feedback from the pulse width modulator as a function of the B+ level.

Whereas the controller VCC supply voltage is generated as a result of controller output pulses, it is necessary to start up the controller into operation from an independent voltage supply when the receiver is first coupled or plugged in to the AC mains. A supplemental startup supply circuit including a storage capacitor is coupled to the VCC input to the TEA2260 and charged via the AC mains at plug-in startup. Once the controller is powered by the voltage ramping up in the storage capacitor to adequate operational levels, the controller begins to generate pulses and can regulate its own VCC level via the feedback from the power supply transformer secondary winding. The VCC level is brought up to a nominal level while being subject to current limiting slow or soft start controls and maximum output limitations which are internal to the TEA2260 controller, and are intended, among other things, to avoid an initial current surge upon plug-in startup.

There is a substantial difference in current loading of the switched mode power supply between the run mode and the standby mode. It is difficult to provide a power transistor capable of driving the primary winding of the power supply transformer at the relatively high power levels needed for operation in the run mode, and also at the very short pulse widths needed in the standby mode. The TEA2260 has a burst mode to accommodate low power requirements during standby. In that mode, the controller alternately ceases generation of pulses, whereupon storage capacitors coupled to the standby loads discharge within a specific range, and then resumes generation of a burst of pulses. The burst mode is thus characterized by periodic occurrences of pulse trains from the switched mode supply controller of sufficient duration to drive VCC to an upper limit, followed by a lapse of pulses during which VCC decays to a lower limit.

In the run mode of the television receiver, the TEA2260 controller operates in a slave mode responsive to a master pulse width modulator coupled to an operational supply on the secondary side of the power transformer. In the standby mode, however, the secondary side input from the pulse width modulator is missing, and accordingly the controller assumes a primary regulation mode wherein its error input, derived from VCC, is the basis of control. This latter situation characterizes

the standby burst mode. In the run mode, when the pulse width modulator is driving the controller, the primary side error input is ignored.

The output stage of the TEA2260 controller has a push-pull output stage including two Darlingtons NPN transistors operated alternately, for producing substantially square pulses. The power transistor coupled to the output of the controller for driving the primary winding of the transformer should be shut off sharply at the end of a pulse, such that conduction in the power transistor, and therefore conduction in the primary winding of the power transformer, correspond closely to the controller output pulse width. However, power transistors are constructed for accommodating substantial current capacity rather than for quick turn off. In saturation of the power transistor during a pulse, a relatively large base region charge is accumulated. As a result the power transistor continues to conduct after the trailing edge of a control pulse, so long as base charge remains. It is known to shut the transistor off more quickly by draining the base charge at the end of a pulse. The time during which the power transistor continues to conduct after the pulse input at the transistor base goes low is known as the turn off delay time and includes the storage time.

In a known base pull down circuit for draining base charge in a power transistor, a capacitor is coupled in parallel with a zener diode, and in series between the output of the controller and the base of the power transistor. When the controller output is high, the capacitor provides current to the transistor base until the zener breaks down, and thereafter the zener conducts base current. The capacitor charges to a voltage defined by the breakdown voltage of the zener diode. When the output of the controller goes low, the capacitor applies a negative voltage to the base of the transistor, and sweeps out the base charge to turn off the transistor more quickly than it would turn off if the pulse were coupled directly to the base of the transistor. Sweeping out the base charge also takes time, but this provision at least shortens the pulse width of the current in the transistor collector to a width more nearly equal to the width of the controller output pulse.

It is also known to provide means for impressing a negative voltage on the output of the controller by developing a negative voltage from one of the secondary windings of the power transformer, and then coupling the negative voltage to the emitter of the output transistor which pulls down the output voltage of the controller between pulses. Such a procedure is not available where the controller is an integrated circuit such as the TEA2260. The emitter of the output transistor in the integrated circuit is internally coupled to ground, and is

thus inaccessible for coupling to a negative bias. Furthermore, undesirably, an additional negative voltage supply must be included in the power supply.

When plugged into the AC mains, the television receiver starts up in the standby mode and the controller operates in the burst mode, providing bursts of short pulses for driving VCC at the controller upwardly within its limits. The controller comprises a number of internal protective circuits which limit the current output of the switched mode power supply such that an initial surge of current is not provided when the receiver is first coupled to the AC mains. A problem is encountered during plug-in startup of the switched mode power supply circuit. The pulldown capacitor in series between the output of the controller and the base of the transistor (which capacitor is to be charged by output pulses from the controller) has not yet been charged. The power transistor cannot be shut off quickly or dependably during the period immediately after plug-in startup. Of course this is the critical period wherein the protective circuits of the controller are expected to prevent a current surge. The storage time during which the power transistor conducts after the falling edge of a controller pulse is long, leading to undependable operation of the switched mode power supply during startup. More particularly, the ineffectiveness of the uncharged pull-down capacitor is such as to defeat initial operation of the protective circuits.

It is a feature of the invention to provide a television receiver comprising a switched mode power supply for regulating at least one output voltage by generation of output pulses coupled to a power transistor. The power transistor is coupled to a primary winding of a power transformer which is coupled to the unregulated input voltage. The switched mode power supply has a sense input coupled to a secondary winding of the power transformer and is operable to regulate the output voltage by modulating a width of the output pulses so as to maintain the output voltage at a predetermined level. A circuit couples the output pulses to the base of the power transistor, the circuit comprising a pull down capacitor in series with the base, and at least one diode in parallel with the pull down capacitor, whereby during the output pulses the pull down capacitor is charged according to a first polarity causing the power transistor to conduct. Following a pulse, the capacitor applies an opposite polarity to the base of the power transistor, for sharply ceasing conduction of current through the power transistor and the primary winding. Means coupled to the unregulated input voltage and to the capacitor precharge the capacitor upon initial appearance of the unregulated input voltage.

In accordance with a further feature of the invention, a television receiver comprises rectifier means providing an unregulated input voltage when coupled to AC mains. A switched mode power supply with a power supply controller regulates at least one output voltage by generation of output pulses coupled to a power transistor, the power transistor being coupled to a primary winding of a power transformer which is coupled to the unregulated input voltage. The power transformer has a secondary winding coupled to a power input of the power supply controller, the controller being operable to modulate a width of the output pulses to maintain the power input at a predetermined level. A startup voltage source is coupled to the unregulated input voltage for providing power to the power input upon initial coupling to the AC mains, thereby initiating operation of the controller until power is available at the secondary winding of the power transformer. A network coupling an output of the power supply controller to a base of the power transistor comprises a capacitor in series between the output of the controller and the base, and at least one diode in parallel with the capacitor, whereby during an output pulse of the controller the capacitor is charged according to a first polarity, causing the power transistor to conduct, and following a pulse the capacitor applies an opposite polarity to the base of the power transistor, for sharply ceasing conduction through the power transistor and the primary winding. Means coupled to the unregulated input voltage and to the capacitor precharge the capacitor upon coupling the rectifier means to the AC mains, and prior to generation of the output pulses by the controller.

In accordance with another feature of the invention, a switched mode power supply comprises a source of unregulated voltage, a load; and a switching transistor coupling said source to said load. A capacitor is coupled to a control terminal of said transistor. A source of control pulses is coupled to the control terminal of said transistor through said capacitor. Means charges said capacitor from said source of unregulated voltage.

FIGURE 1 is a detailed schematic diagram showing the circuit of the invention.

FIGURES 2-4 are corresponding timing diagrams illustrating the normal operation of the switched mode power supply, FIGURE 2 showing the voltage signal at the base of the power transistor, FIGURE 3 showing the current signal, and FIGURE 4 showing the collector current.

FIGURES 5-9 are corresponding timing diagrams illustrating normal operation of the power supply, and in a more compressed time scale, respectively showing the voltage at the output of the controller, the current in the base of the power transistor, the voltage at the base of the power

transistor, the current in the pull-down capacitor and the voltage across the pull-down capacitor.

FIGURES 10-13 are corresponding timing diagrams showing plug-in start-up operation of the circuit according to the invention, in particular during the first pulse from the power supply controller, respectively showing the voltage at the base of the power transistor, the current in the base of the power transistor, the voltage at the output of the controller, and the current in the power transistor collector.

FIGURES 14-17 are corresponding timing diagrams showing plug-in start-up operation of a circuit as in FIGURE 1, but where the pull down capacitor is not precharged. FIGURES 14-17 correspond to FIGURES 10-13 for such a circuit.

FIGURE 18 is a timing diagram showing the voltage across the pull-down capacitor following coupling of the receiver to the AC mains, illustrating precharging of the pull-down capacitor.

FIGURE 19 is a timing diagram according to the invention, showing the voltage at the base of the power transistor over an extended time following start-up, with precharging of the pull-down capacitor.

FIGURE 20 is a timing diagram comparable to FIGURE 19, showing the voltage at the base of the power transistor over an extended time following start-up, but without precharging of the pull-down capacitor.

In FIGURE 1, power to the television receiver from AC mains 22, which can be between 90 and 250 VAC for operation worldwide, is full wave rectified by bridge 24 and filtered by capacitor CP06 and resistor RP03, to provide the unregulated input voltage VIN, coupled to the primary winding W1 of power transformer LP36. The other terminal of winding W1 is coupled to the collector of power transistor TP29, which is driven by the output of switched mode power supply controller 20, such as SGS-Thomson Microelectronics type TEA2260, the respective pin numbers of connections to the controller being shown in the figure.

Controller 20 has two operational modes. In the slave mode, controller 20 is responsive to width modulated pulses fed back from a pulse width modulator 92. The width of the pulses controls the energy transferred from unregulated input voltage VIN to the B+ regulated output and other secondary supplies of transformer LP36. The B+ output is coupled to a horizontal deflection circuit 88, for driving horizontal scanning via a flyback transformer (not shown) and thereby coupling power to various loads which are energized only in the run mode of operation of the television receiver. The pulse width modulator is coupled to the B+ supply and to synchronizing pulses VS from the horizontal deflection circuit 88.

In a second mode of operation of controller 20, i.e., when no width modulated pulses are applied for regulation from the secondary side of the power supply due to lack of horizontal scanning, controller 20 reverts to a primary regulation mode based upon an error input derived from secondary winding W3 of power transformer LP36. Regulation via the error input is active only in the absence of pulses from the secondary side feedback from pulse width modulator 92. When such pulses are present, the error input is ignored.

The television receiver powers up operation in the standby mode when coupled to AC mains 22, and can be switched into the run mode under control of microprocessor 82. Microprocessor 82 as well as the power supply controller 20 are powered during the standby mode as well as the run mode. Microprocessor 82 has an input ON/OFF coupled to a switching means, such as an infrared receiver, and an output coupled to horizontal deflection circuit 88 for disabling the horizontal deflection circuit and switching into the standby mode.

When first coupled to AC mains 22, power to the VCC pin of controller 20 is provided by a startup current supply coupled to the unregulated VIN voltage from bridge rectifier 24. Capacitor CP28, which is coupled to VCC pin 16 of controller 20, is charged through a relatively high value current limiting resistor RP06. As the VCC voltage across capacitor CP28 ramps up, controller 20 becomes operational and begins to output pulses. The output pulses from controller 20 are coupled to power transistor TP29 which couples the unregulated VIN to primary winding W1 of power transformer LP36. The resulting pulses on secondary winding W3 are rectified by diode DP08, filtered by capacitor CP28, and coupled to the VCC input of controller 20. The controller thus powers itself after starting initially from the charge applied to capacitor CP28 through start-up resistor RP06.

Controller 20 has a number of internal limiting and shutdown circuits 50 to prevent overvoltage or overcurrent conditions from occurring or persisting, and can limit its output as the power supply powers up, for avoiding a potentially damaging surge of current into uncharged storage capacitors, and the like, upon start-up. To this end, a soft start circuit 40 is coupled to a capacitor CP08 to define the rate at which the amplitude of successive output pulses can increase. According to the TEA2260, minimum and maximum VCC voltage limits are established by a VCC monitoring circuit and over-voltage comparator in a protection circuit 50. Repeated overload is sensed by a comparator coupled to internal voltage and current references. Maximum output current in power transformer LP36 is limited by current limiting comparators coupled to a current sensing resistor RP32 in series with the

emitter of power transistor TP29. Demagnetization is sensed by winding W3 being coupled to protection circuit 50 at pin 1.

In the standby mode, when no pulses are provided from pulse width modulator 92, controller 20 regulates the voltage from secondary winding W3 as sensed at the error input, pin 6, of an error amplifier 34. The sensed level is provided via a voltage divider comprising resistor RP14, variable resistor PP16 and resistor RP13, coupled between VCC and ground. The sensed voltage level is thus a proportion of VCC, and is compared with an internal reference, VREF, of 2.49 volts coupled to the noninverting input of error amplifier 34. Resistor RP17 is coupled between the output of the error amplifier 34 and the inverting input, to set the gain of the error amplifier.

When operation of controller 20 has driven VCC to a high enough level that the error amplifier output indicates that a high VCC threshold level has been reached, controller 20 enters the burst mode and internally revises its operation to track on 90% of the reference level of voltage VREF rather than 100%. Generation of pulses ceases, and the VCC voltage accumulated in storage capacitor CP28 decreases over time until the voltage meets the 90% threshold. At that point, controller 20 resumes the original 100% threshold level and outputs a train of pulses to recharge the VCC output to produce a 100% reference level at the inverting input of comparator 34, and so forth. The regulated output voltage at VCC defines a series of rising and falling ramp voltages with a hysteresis between the two thresholds.

The output of error amplifier 34 is coupled to modulators 36, 38, which are also coupled to the soft start rising reference voltage level obtained from soft start circuit 40, and to the ramp output of an oscillator 42. The modulator outputs are coupled to modulation logic and automatic burst generator 44, the latter being coupled to a pulse output of oscillator 42. The oscillator ramp slope, the pulse width, and the oscillator frequency are set via external resistor RP09 and capacitor CP09.

An IS logic stage 32 preferentially couples the input from the secondary winding WS of pulse width modulator transformer LP42 through to the output of controller 20, via a resistor RP41. However when no pulses are received through resistor RP41, the output of modulator logic element 44 is coupled through to the output of the controller. Regulation pulses from IS logic block 32 are coupled to logic processor 52, and through positive and negative output drivers 62, 64 to Darlington pair output transistors 66, 68. Output transistors 66, 68 are operated alternately in a push-pull arrangement wherein only one is conductive at any one time. Output transistor 66 supplies current to the control-

ler output pin via VCC and a resistor RP26, which sets the positive output current level. Output transistor 68 sinks current from output pin 14, effectively grounding the output pin of controller 20.

The output of controller 20 is coupled to the base of power transistor TP29 through a base network, including a pull-down capacitor CP24 in parallel with at least one diode, and preferably a plurality of diodes DP24, DP26 and DP27. At the leading edge of a pulse at the output of controller 20, diodes DP24, DP26 and DP27 are forward biased and thus define a 3-diode drop, capacitor clamping voltage of about 2.1 volts. The diodes determine the maximum charge for capacitor CP24. At the trailing edge of a pulse at the output of controller 20, output transistor 68 grounds the more positive terminal of pull-down capacitor CP24, thus placing a negative voltage of 2.1 volts on the base of transistor TP29. The negative voltage from the accumulated charge in capacitor CP24 generates a negative base current which sweeps out the base charge in power transistor TP29. This quickly stops conduction of TP29. Inductor LP28, paralleled by a damping resistor RP28, provides current pulse shaping to the base of transistor TP29. A resistor RP29 provides base-emitter biasing. The LC network, including inductor LP28 and the transistor base capacitance, establishes the slope of the reverse base current in power transistor TP29 when the base current is to be reversed by the application of a negative voltage from capacitor CP24. Inductance in the base circuit is also responsible for certain spikes which appear in the controller output voltage (see, e.g., FIGURE 5) and in the collector current (e.g., FIGURE 13).

At the collector of transistor TP29, a damping arrangement is defined by diode DP29 and resistor RP31, with capacitors CP29 and CP31 being coupled in parallel with diode DP29 and resistor RP31, respectively.

In addition to the secondary winding W3, which provides power for VCC of the controller 20, other secondary windings W2, W4 and W5 provide other output voltages which are regulated by the controller, together with regulation via the B+ supply during scanning or the VCC supply in the absence of scanning. The signal on secondary winding W2 is rectified by a diode DP50 and filtered by a capacitor CP51, providing the regulated B+ output at +118V for powering horizontal deflection circuit 88. A +19V supply is provided by winding W4, as rectified by diode DP63 and filtered by capacitor CP64, for energizing a load, shown as resistor RL1. Winding W5 provides +24V via a diode DP92 and a capacitor CP86 for energizing a load, shown as resistor RL2.

The output voltages at all the secondary windings of power transformer LP36 are regulated

together with regulation of VCC by controller 20. Since controller 20 operates in both the run mode and the standby mode, the secondary supplies including the B+ voltage are always generated. The +19V supply is further regulated to +5V by a regulator 26, for providing a stable supply voltage to microprocessor 82, notwithstanding the rise and fall of VCC during standby in the burst mode of controller 20.

According to an inventive feature, the positive terminal of the pull-down capacitor CP24 is coupled to the unregulated input voltage VIN. The unregulated voltage VIN appears as soon as the circuit is coupled to the AC mains, i.e., before controller 20 begins to output pulses. The timing diagrams of FIGURES 2-9 illustrate steady state circuit conditions in the standby mode of the television receiver, when the controller 20 operates in its burst mode. FIGURES 10-20 illustrate circuit conditions following plug-in startup, i.e., initial connection of power to AC mains 22. All the figures represent idealized traces of the respective signals, with certain noise and coupling effects omitted for clarity.

The output pulse V_{CON} of controller 20 goes high at time t_1 of Figure 5, and remains high until time t_2 , when the output drops essentially to ground. As seen in FIGURES 2 and 7, the voltage at the base of power transistor TP29, however, remains high following the trailing edge of the controller pulse at t_2 due to the base charge in the power transistor TP29. As a result, transistor TP29 continues to conduct collector current in saturation following time t_2 .

Whereas the push-pull output circuit of controller 20 grounds the positive terminal of capacitor CP24 at the trailing edge, the current in the base of power transistor TP29 reverses at time t_2 , as shown in FIGURES 3 and 6, as current from capacitor CP24 sweeps out the base charge. Capacitor CP24 is normally charged to about 2.32 V. The base charge is also drained due to collector conduction of transistor TP29, at a relatively slower rate. The time from t_2 to t_3 , during which the charge in the base region is drained, defines the storage time of the circuit.

When the base-emitter charge is exhausted at time t_3 , current in the base of transistor TP29 quickly goes to zero as shown in FIGURE 3, and the voltage at the base goes negative as shown in FIGURE 2. About 3.24 microseconds elapses as the saturation excess charge is removed from the base. The base-emitter junction becomes reverse biased, switching the transistor off. Reversing of the bias of the base-emitter junction and the cessation of current in the collector occur between times t_3 and t_4 , providing the downramping portion of the current waveform in the collector, and therefore in

the primary winding of the power transformer, as shown in FIGURE 4. The voltage at the base of transistor RP29 then returns to a slightly negative voltage, due to the charge on capacitor CP24 and conduction from ground through current sensing resistor RP32, biasing resistor RP29, and inductor LP28. Some ringing occurs in the base voltage due to parasitic capacitance associated with transistor TP29.

In FIGURE 5, the respective waveforms are shown over several pulses from controller 20. The output of controller 20, V_{CON} , shown in FIGURE 5, is substantially a square pulse, but has an initial spike due to the high reactance of inductor LP28 at this edge, and some trailing ringing, due to current reversal and capacitive interaction at the base of the power transistor TP29. Following the initial spike, the level of the pulse increases with charging of capacitor CP24, however, the charging of capacitor CP24 during any one pulse is minimal, being only sufficient to replace the charge drained from capacitor CP24 during the remainder of a cycle. As a result, in normal operation, as shown in FIGURE 9, the voltage across capacitor CP24 remains relatively smooth, having a charging phase from times t_1 to t_2 and a discharging phase as the base charge is drained from times t_2 to t_3 .

In FIGURE 6, the current I_{BASE} in the base of transistor TP29 is positive during the voltage pulse V_{CON} from t_1 to t_2 , and reverses at t_2 due to the application of the voltage across capacitor CP24 at the trailing edge of the voltage pulse. The current increases in negative amplitude, at a slope defined by inductor LP28 until the charge is exhausted at t_3 , and returns to zero at t_4 .

Whereas in normal operation capacitor CP24 remains substantially charged as shown in FIGURE 9, the voltage V_{BASE} as shown in FIGURE 7 is negative except during the interval from t_1 to t_3 , i.e., during the pulse from controller 20 and after the pulse from t_2 to t_3 , while the base emitter charge is swept out. The current in capacitor CP24 as shown in FIGURE 8 is also negative between pulses, due to a current path from ground through resistors RP32, RP29 and inductor LP28. Between t_2 and t_3 , the current in capacitor CP24 is reversed, corresponding to the reversal of current in the base (FIGURE 6). The charging of capacitor CP24 between t_1 and t_2 is equal to the discharging from t_2 to t_4 , plus the discharging which occurs between pulses. Accordingly, the capacitor voltage is relatively steady as in FIGURE 9.

Normal operation of the circuit relies on the voltage across capacitor CP24 to turn off the power transistor TP29 within a short time following the trailing edge of a controller pulse. There is a minimum limit, however, because after a given pulse of any width, a certain time elapses while the base

charge is swept from transistor TP29. According to an inventive feature, upon initial connection of the circuit to the AC mains, capacitor CP24 is charged through a startup resistor RP324. As shown in FIGURE 18, with initial connection to the AC mains, capacitor CP24 is charged to the maximum 2.1V permitted by diodes DP24, DP26 and DP27, before the power-up supply voltage VCC of controller 20 is high enough for the controller to begin outputting pulses.

The first pulse following plug-in startup as shown in FIGURES 10-13 is much the same as the steady state pulses discussed above. Following the trailing edge of the voltage pulse V_{CON} at the output of controller 20 (FIGURE 12), the base current I_{BASE} reverses due to the voltage reversal (FIGURE 10) provided by output transistor 68 grounding the positive terminal of capacitor CP24, sweeping out the base-emitter charge. When the charge is exhausted at time t_3 , the base current returns to zero at t_4 and the collector current drops to zero. The collector current I_{COL} continues to increase so long as transistor TP29 is conducting, to a peak of about 1.3 A, with a storage time of about 2 microseconds. The sweeping of the base charge is such that the cessation of collector current (FIGURE 13) follows shortly after the falling edge of the controller output pulse.

The situation depicted in FIGURES 10-13 can be directly compared to the performance of the same circuit in the absence of resistor RP324 precharging capacitor CP24, as shown in FIGURES 14-17. FIGURES 14-17 illustrate the initial pulse. However, the differences in the waveforms of FIGURES 14-17, as compared to FIGURES 10-13, will persist over a number of controller pulse cycles. The base voltage as shown in FIGURE 14 rises at time t_A with the rising edge of the output pulse from controller 20, shown in FIGURE 16. Reversal of the base current at the trailing edge, time t_B , of the controller output pulse cannot occur or at best is only minimal because, in the absence of resistor RP324, capacitor CP24 is charged only by the output of the controller 20 via current from VCC through resistor RP26. A number of pulses must occur to charge capacitor CP24 up to a voltage where the accumulated charge is sufficient to completely sweep the base-emitter charge from transistor TP29.

At time t_B , the base voltage drops slightly, but the base region remains sufficiently charged to maintain conduction of transistor TP29. At some time t_C after the trailing edge of the controller pulse, the base current flow in transistor TP29 and other processes have exhausted the base charge, and the base voltage V_{BASE} finally drops off. By this time the collector current in transistor TP29 has risen to a much higher level, about 2.2 A peak,

than it would rise in the steady state when capacitor CP24 is effective for sweeping out the base charge. As a result of the ineffectiveness of the uncharged pull-down capacitor, the circuit operates with a storage time of about 5.78 microsecond. This undesirably defeats the soft start protection feature of the controller which attempts to limit the first current pulse to three microseconds.

A further undesirable aspect is that the positive terminal of capacitor CP24 will not be pulled down to ground potential by conduction of Darlington transistor 68, but instead to the collector terminal voltage level. This level for a Darlington transistor could be significant - about 0.8 volt.

The start-up output limiting circuits included in the TEA2260 controller are meant to limit the occurrence or persistence of overvoltage or overvoltage conditions. A power supply is especially prone to overcurrent conditions when initially coupled to the AC mains, because storage capacitors and other components of the load circuits draw maximum current. The lack of an effective means for sweeping out the base charge in power transistor TP29, during start-up phases of operation, tends to defeat the protection circuits because transistor TP29 continues to conduct for a longer time following the trailing edge of a controller pulse. The controller is less able to precisely control the output of the power supply.

FIGURES 19 and 20 compare the start-up operation of the circuit of the invention with a comparable circuit lacking precharging of the pull-down capacitor. In FIGURE 19, the base voltage according to the invention is negative due to precharging of capacitor CP24 when the first pulse occurs at the output of controller 20. A transient variation in the amplitude of the low-going base voltage spike occurs as the voltage at the positive terminal of capacitor CP24 drops to its steady state value. However, the power supply promptly achieves steady state operation.

In FIGURE 20, the base voltage is near zero rather than negative preceding the first controller pulse. The negative base voltage spike is missing or small for a number of successive cycles during which the controller is relatively less able to precisely control the current in transistor TP29. Over about 3.82 milliseconds, capacitor CP24 becomes charged to about 1.8 V, the base voltage preceding a pulse drops to negative, and steady operation is achieved. However, direct comparison of FIGURES 19 and 20 shows that the interval to achieve steady state operation, during which interval the protection circuits of the controller are relatively ineffective, is much shorter when precharging the pull-down capacitor according to the invention than when starting up without a voltage thereon. Whereas the circuit of the invention achieves its short storage

time upon the initial controller pulse, a comparable circuit operating, for example, at 18 KHz requires some 68 cycles over 3.8 milliseconds to achieve a short storage time.

Claims

1. A television receiver comprising:
 - a switched mode power supply for regulating at least one output voltage by generation of output pulses (V_{con}) coupled to a power transistor (TP29), the power transistor being coupled to a primary winding (W1) of a power transformer (LP36) which is coupled to an unregulated input voltage, the switched mode power supply having a sense input (2) coupled to a secondary winding (W2) of the power transformer and being operable to regulate the output voltage by modulating a width of the output pulses so as to maintain the output voltage at predetermined levels;
 - a circuit coupling the output pulses (V_{con}) to a base of the power transistor, the circuit comprising a pull down capacitor (CP24) in series with the base, and at least one diode (DP24, 26, 27) in parallel with the pull down capacitor, whereby during the output pulses the pull down capacitor is charged according to a first polarity causing the power transistor to conduct, and following a pulse the capacitor applies an opposite polarity to the base of the power transistor, for sharply ceasing conduction of current through the power transistor and the primary winding; characterized by,
 - means (RP324) coupled to the unregulated input voltage (V_{IN}) and to the capacitor (CP24) for precharging the capacitor upon initial appearance of the unregulated input voltage.
2. The television receiver according to claim 1, characterized in that the means coupled to the unregulated input voltage and to the pull down capacitor comprise a resistor (RP324) coupled between the unregulated input voltage (V_{IN}) and a terminal of the pull down capacitor (CP24).
3. The television receiver according to claim 1, characterized by a power supply controller (20) in the switched mode power supply, the sense input (2) being an error input of the power supply controller coupled to the output voltage ($B+$).
4. A television receiver comprising:
 - rectifier means (24) providing an unregulated input voltage (V_{IN}) when coupled to AC mains;

a switched mode power supply with a power supply controller (20) for regulating at least one output voltage by generation of output pulses coupled to a power transistor (TP29), the power transistor being coupled to a primary winding (W1) of a power transformer (LP36) which is coupled to the unregulated input voltage, and the power transformer having a secondary winding (W3) coupled to a power input (16) of the power supply controller, the controller being operable to modulate a width of the output pulses to maintain the power input at predetermined levels;

a startup voltage source (RP06, CP28) coupled to the unregulated input voltage for providing power to the power input upon initial coupling to the AC mains, thereby initiating operation of the controller (20) until power is available at the secondary winding (W3) of the power transformer;

a network (CP24, LP28) coupling an output (V_{con}) of the power supply controller to a base of the power transistor, the network comprising a capacitor (CP24) in series between the output (14) of the controller and the base of the transistor, and at least one diode (DP24, 26, 27) in parallel with the capacitor, whereby during an output pulse of the controller the capacitor is charged according to a first polarity causing the power transistor to conduct, and following a pulse the capacitor applies an opposite polarity to the base of the power transistor, for sharply ceasing conduction through the power transistor and the primary winding; characterized by,

means (RP324) coupled to the unregulated input voltage (VIN) and to the capacitor (CP24) for precharging the capacitor upon coupling the rectifier means (24) to the AC mains, and prior to generation of the output pulses by the controller (20).

5. The television receiver according to claim 4, wherein the means coupled to the unregulated input voltage and to the pull down capacitor comprise a resistor coupled between the unregulated input voltage and a terminal of the pull down capacitor coupled to an output terminal of the power supply controller.
6. The television receiver according to claim 4, wherein the power supply controller has a sense input coupled to an error amplifier, and produces the pulses in a burst mode characterized by distinct thresholds between which the controller regulates a voltage at the power input, thereby providing a burst mode of operation.

7. The television receiver according to claim 1 or 4, wherein the means coupled to the unregulated input voltage and to the pull down capacitor comprise a resistor coupled between the unregulated input voltage and a terminal of the pull down capacitor, and wherein the power supply controller has a push-pull output stage, the pull down capacitor being coupled to the push-pull output stage.

8. The television receiver according to claim 7, wherein the power supply controller comprises an integrated circuit having biasing terminals for the push-pull output stage which are internal to the integrated circuit and are therefore inaccessible.

9. The television receiver according to claim 7, wherein the resistor is coupled to an output of the push-pull stage which is coupled to the pull-down capacitor.

10. A switched mode power supply comprising:
 a source (VIN) of unregulated voltage;
 a load (88);
 a switching transistor (TP29) coupling said source to said load;
 a capacitor (CP24) coupled to a control terminal (base) of said transistor;
 a source (20) of control pulses (V_{con}) coupled to the control terminal of said transistor through said capacitor (CP24); characterized by
 means (RP324) for charging said capacitor (CP24) from said source (VIN) of unregulated voltage.

11. A power supply according to claim 10, characterized by means (DP24, 26, 27) for clamping the voltage across said capacitor (CP24) to a predetermined value.

12. A power supply according to claim 11, characterized in that said clamping means comprises diode means (DP24, 26, 27).

13. A power supply according to claim 10, characterized by an inductor (LP28) coupled in series with said capacitor (CP24).

14. A power supply according to claim 10, characterized by a transformer (LP36) coupled between said transistor (TP29) and said load (88).



FIG. 2

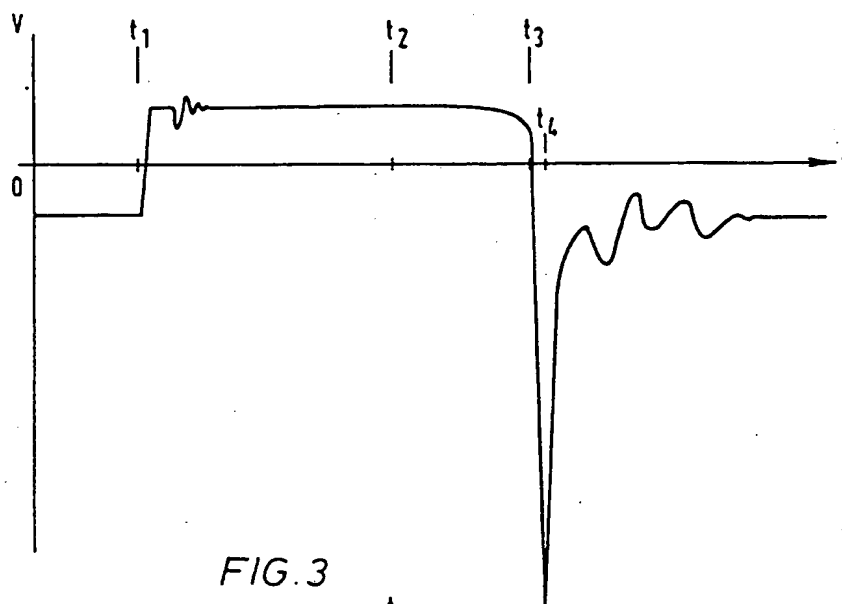


FIG. 3

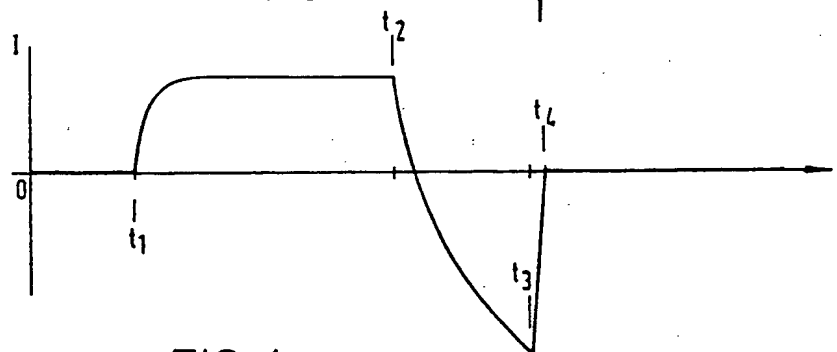


FIG. 4

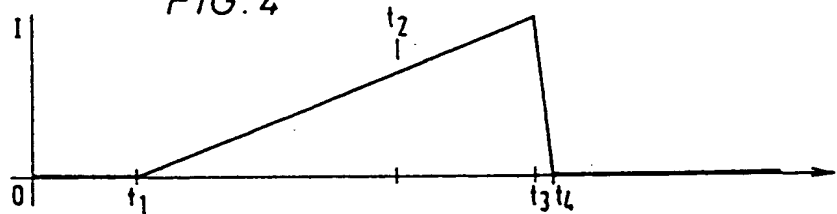


FIG. 5

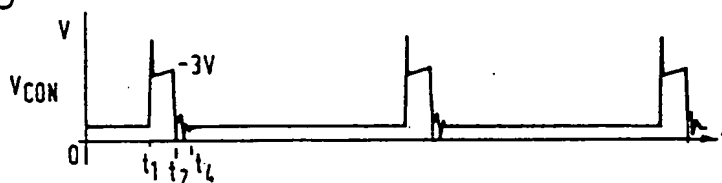


FIG. 6

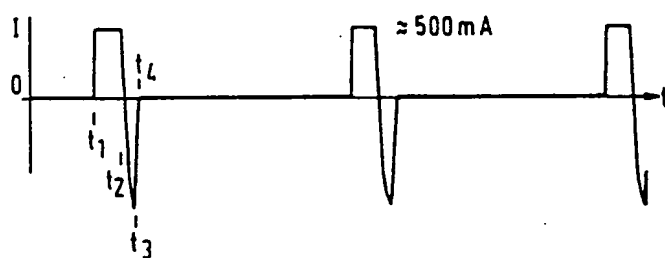


FIG. 7

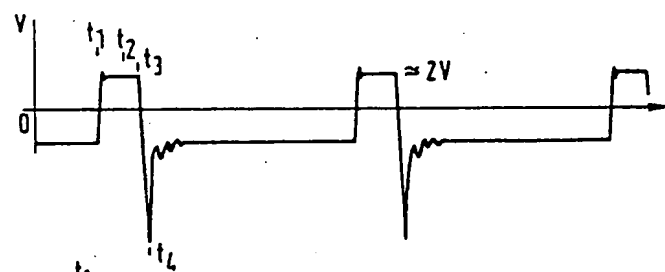


FIG. 8

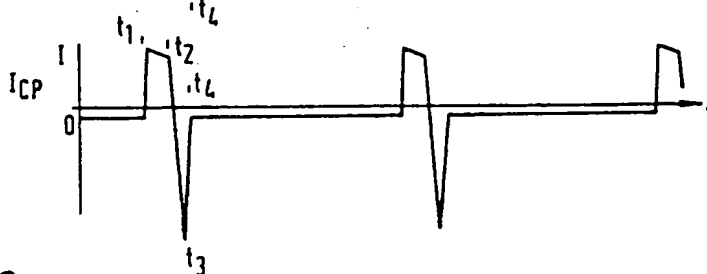


FIG. 9

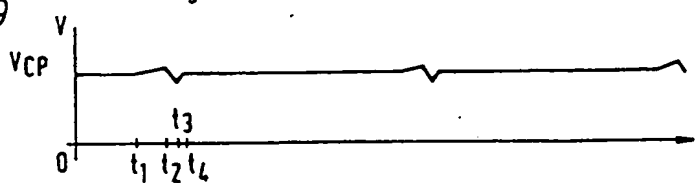


FIG.10

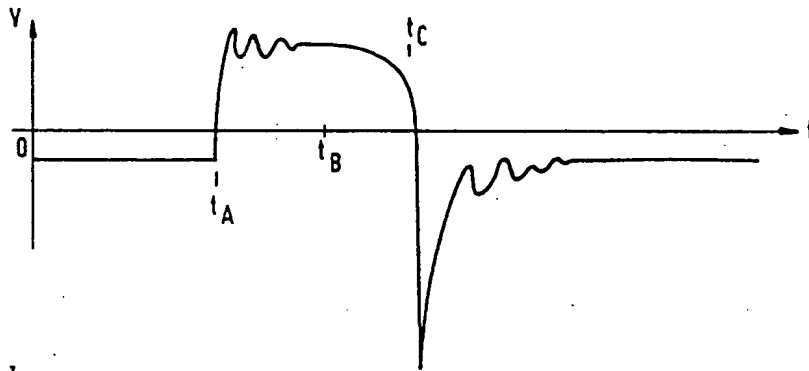


FIG.11

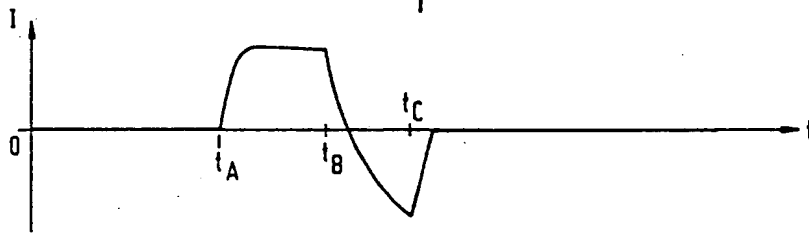


FIG.12

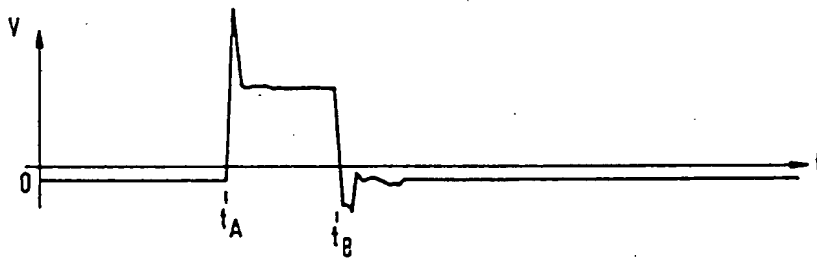


FIG.13

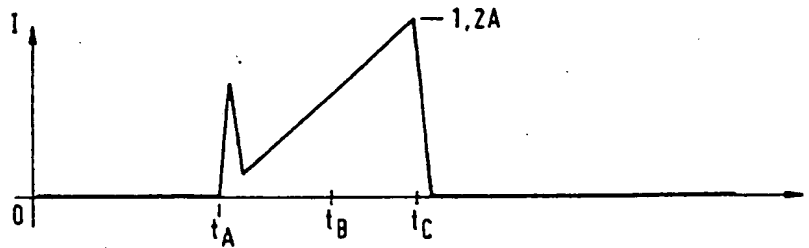


FIG. 14

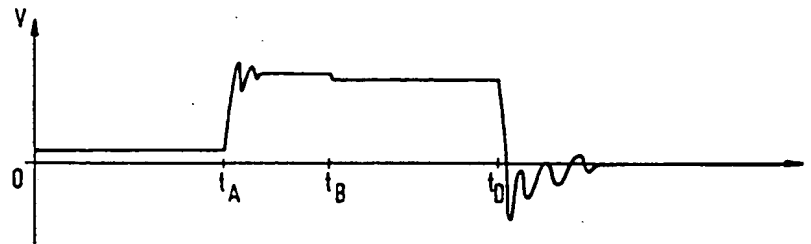


FIG. 15

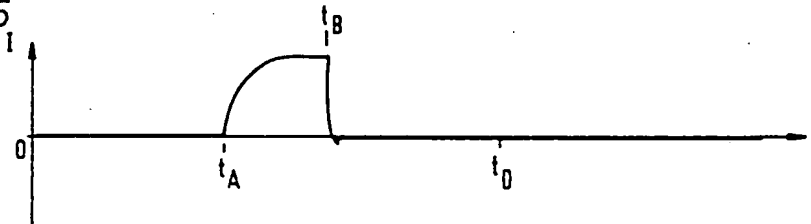


FIG. 16





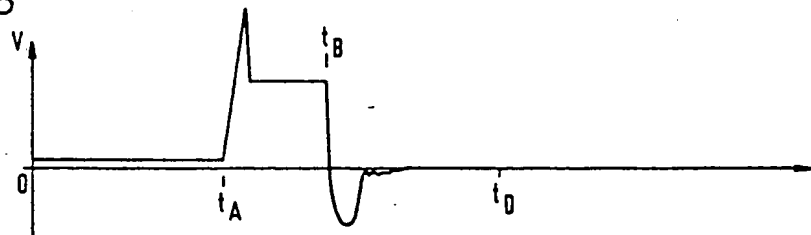


FIG. 17

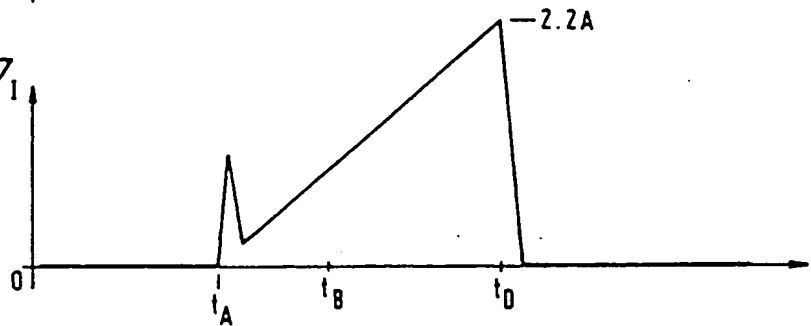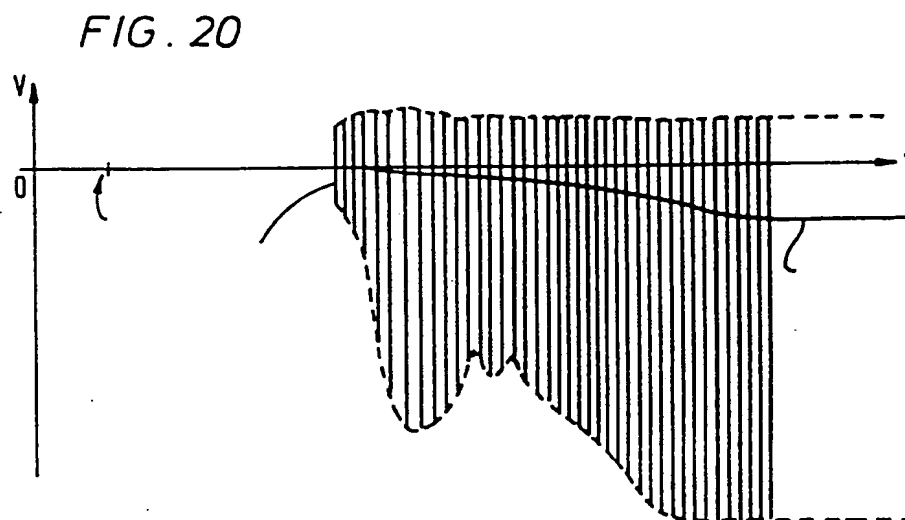

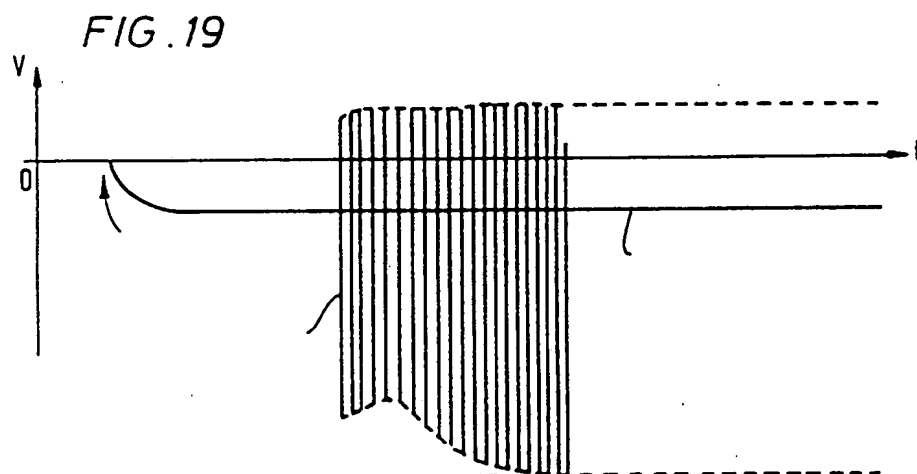

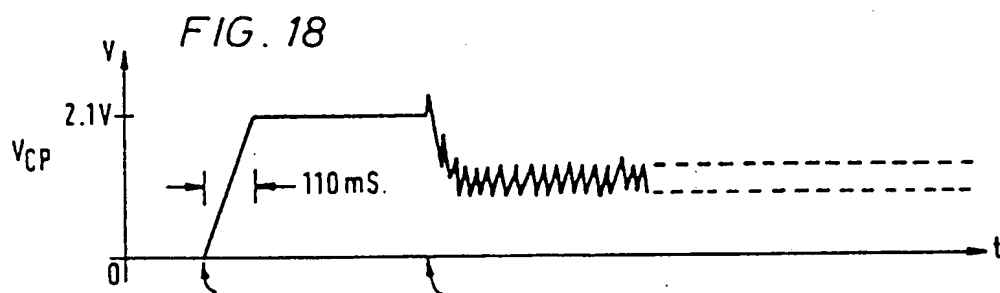

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 92 11 2632

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A	ELEKTRONIK vol. 39, no. 9, 27 April 1990, MUNCHEN DE pages 134 - 140 , XP000116204 W. BLAESNER * page 139, right column, line 1 - line 5; figure 8 *	1-14	H04N5/63 H04N3/185
A	US-A-4 994 719 (LENDARO) * figure *	1-14	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			H04N
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 OCTOBER 1992	Examiner MONTANARI M.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if taken with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons * : member of the same patent family, corresponding document			